





MODÈLE	Diamètre moteur (mm)	Couple Nominal (N.m)	Nombre de Tours / Min	Puissance Nominale (W)	Tension Nominale (V)	Mode de contrôle	Fréquence (MHz)	Courant nominal (A)	Indice de protection	Référence Article
AM60-80/12-MEL	60	80	12	400	AC 230V	RF	433,92	1,7	IP44	AR00102
AM60-100/12-MEL	60	100	12	420	AC 230 V	RF	433,92	1,85	IP44	AR00103
AM60-120/9-MEL	60	120	9	396	AC 230V	RF	433,92	1,75	IP44	AR00130
AM60-140/9-MEL	60	140	9	420	AC 230 V	RF	433,92	1,85	IP44	AR00131

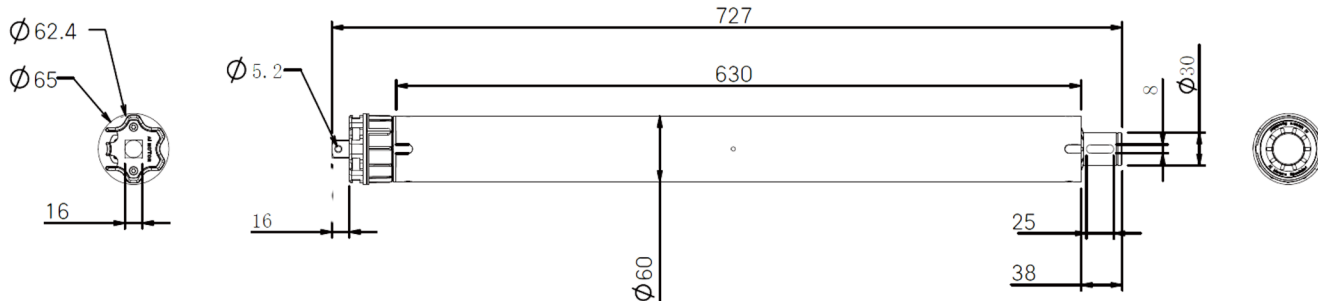

Fins de courses électroniques depuis émetteur.

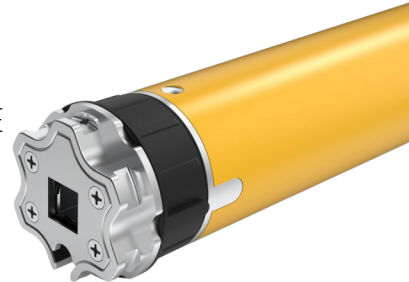

Récepteur intégré 433.92 MHz.



Sécurité antigel



Indice de protection IP44

Détection et arrêt sur obstacle pour une protection de l'installation et des biens.



Compatible* avec la domotique TUYA.



Tête moteur étoilée en Zamak intégrée.



Box domotique
AC520

*L'accès à la domotique Tuya nécessite une passerelle : Box Tuya (réf AR00149) et l'application Tuya Smart  disponible sur App Store  et Play Store .

